
Füllstandsensor / Level sensor
BAUREIHE XS / SERIES XS

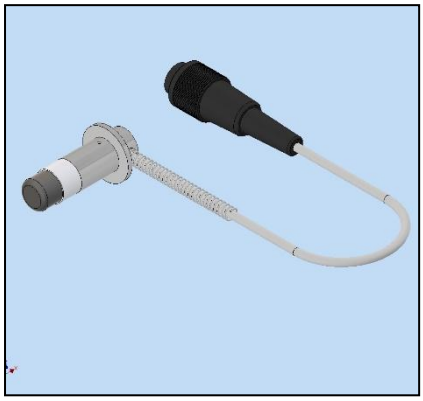


Art.-Nr.	**: 1625 9914**
Typ	**: XS2T-14/51L25**
Eigenschaft	**: Füllstandsensor mit beschichteter aktiver Zone 1 oder 2 Schaltpunkte und Analogauswertung**
Part-No.	**: 1625 9914**
Type	**: XS2T-14/51L25**
Feature	**: Level sensor with coated active zone 1 or 2 switching points and analogue evaluation**

TECHNISCHE DATEN

Temperaturbereich Sensor	: -10°C bis 250°C
Temperaturbereich Kabel	: -10°C bis 200° C
Material	: PTFE / Al / MS
Kabellänge inkl. Stecker	: ca. 2480mm
Stecker	: Binder Bajonett Serie 678, 3-polig
Zubehör	: ---
Verwendung mit	: Schaltverstärker der Baureihen: SLC-1 SLC-11 SLC-1HV SLC-2 SLC-4/20 SLCA-DUO
Aktive Zone / Schaltbereich	**: horizontal 1-14 mm vertikal 1-10 mm**
Einbaulage	**: horizontal/vertikal**

TECHNICAL DATA

Ambient temperature sensor	: -10°C to 250°C
Ambient temperature cable	: -10°C to 200°C
Material	: PTFE / Al / MS
Cable length incl. plug	: ca. 2480 mm
Plug in	: Binder Bayonet Serie 678, 3-pin
Equipment	: ---
Useable with	: Switching amplifier Series: SLC-1 SLC-11 SLC-1HV SLC-2 SLC-4/20 SLCA-DUO
Active zone / Switching range	**: horizontal 1-14 mm vertical 1-10 mm**
Mounting position	**: horizontal/vertical**

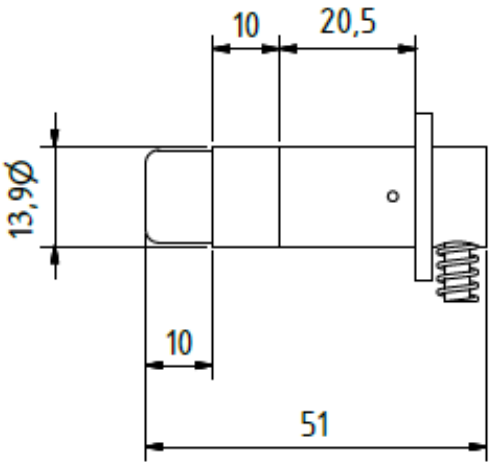

SENOTEC OCHMANN GMBH | OTTO-VON-GUERICKE-STR. 20 | 53757 SANKT AUGUSTIN | GERMANY
TELEFON +49 (22 41) 25 188-0 | TELEFAX +49 (22 41) 25 188-22 | INFO@SENOTEC.DE | WWW.SENOTEC.DE