
Füllstandsensor / Level sensor
BAUREIHE S / SERIES S

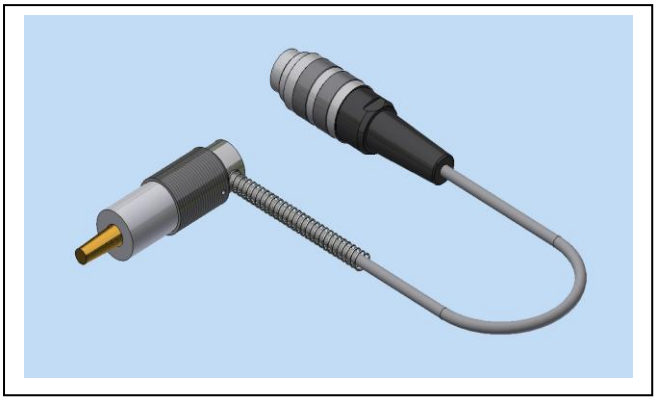

Art.-Nr. : 180 31
Typ : S3GQW-20/65L30
Eigenschaft : Füllstandsensor mit beschichteter aktiver Zone


Part-No. : 180 31
Type : S3GQW-20/65L30
Feature : Level sensor with coated active zone

TECHNISCHE DATEN

Temperaturbereich Sensor	: -10°C bis 250°C
Temperaturbereich Kabel	: -10°C bis 200° C
Material	: PTFE / Al / MS
Kabellänge inkl. Stecker	: ca. 2980mm
Stecker	: 3-polig DIN 41524
Zubehör	: 2 Befestigungsmuttern M18x1 SW24
Verwendung mit	: Schaltverstärker der Baureihen CLS, CLC, CSV, DLC10, DLC22
Aktive Zone / Schaltbereich bezogen auf Sensorspitze	**: 0 – 10 mm**
Einbaulage	**: vertikal/horizontal**

TECHNICAL DATA

Ambient temperature sensor	: -10°C to 250°C
Ambient temperature cable	: -10°C to 200°C
Material	: PTFE / Al / MS
Cable length incl. plug	: ca. 2980 mm
Plug in	: 3-phase DIN41524
Equipment	: 2 mounting nuts M18 x 1 SW24
Useable with	: Switching amplifier series CLS, CLC, CSV DLC10, DLC22
Active zone / Switching range: 0 – 10 mm related to probe tip	
Mounting position	**: vertical/horizontal**

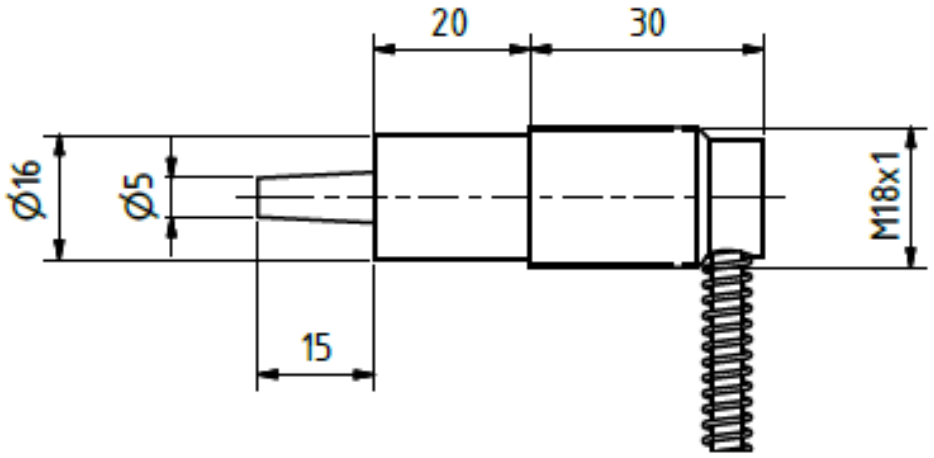

SENOTEC OCHMANN GMBH | OTTO-VON-GUERICKE-STR. 20 | 53757 SANKT AUGUSTIN | GERMANY
TELEFON +49 (22 41) 25 188-0 | TELEFAX +49 (22 41) 25 188-22 | INFO@SENOTEC.DE | WWW.SENOTEC.DE